



DFT Classic® Fluoropolymer Series Filter Cartridges

Depth Filters for Aggressive and High Temperature Fluids

- All PTFE for compatibility with a wide range of process fluids
- Available in retention ratings of 0.5, 1, 3, 10, or 25 microns (μm)
- Fits into most standard housings
- May be used as a final filter in many applications, or to provide superior protection for membrane final filters
- PVDF and PFA housings are available for use in all fluoropolymer filtration systems
- M3¹ or DOE end configurations are available as standard products

Performance Specifications

Filter Grades:

0.5, 1, 3, 10, 25 μm

Maximum Operating Temperature:

PTFE is compatible with nearly all chemicals up to 365°F (185°C). Primary exceptions are fluorine, chlorine, and oxygen at temperatures in excess of 212°F (100°C).

Product Specifications

Materials of Construction:

Filter Media:	PTFE (Fluoropolymer)
Center Core:	PTFE
222 O-ring*:	Fluoropolymer Encapsulated Fluorocarbon Elastomer (standard)

Dimensions (nominal):

Outside Diameter:	2 1/2" (6.35 cm), DOE only 2 13/16" (7.14 cm), M3 only
Lengths:	10" (25.4 cm), 20" (50.8 cm), 30" (76.2 cm), Consult factory for 40" (102 cm) length


Applications

Acid Etch Systems - Including Piranha Etch Solvent Strip Applications

Most Aggressive and/or High Temperature Acids or Solvents

Additional High Temperature Materials

Pall can also supply DFT Classic filter cartridges in PPS (polyphenylene sulfide) for high temperature and aggressive applications. Additional PTFE products are also available, including the Fluoryte™ Series filter cartridge, an all-fluoropolymer membrane cartridge. Contact your local Pall representative or distributor for specific information on these products.

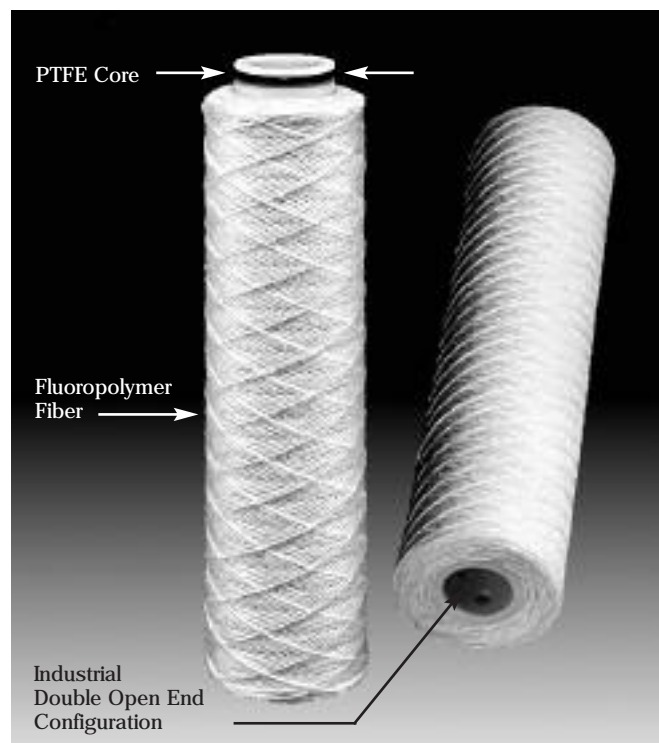

Recirculating Applications


Retention ratings, by convention, are for single pass applications. Many applications involve recirculating systems, where the filter media has several opportunities to capture contaminant. For example, in a 4 gallon (15.1 liter) system circulating at 2 gpm (7.6 lpm), the fluid passes through the filter cartridge five times in ten minutes. Thus, the effective retention of a filter cartridge is much finer. Specifically, a cartridge rated at 0.5 μm (nominal) on a single pass is often an effective 0.2 μm (nominal) filter on a recirculating basis.

¹ - Modified M3 end cap configuration features single 222 O-ring; M3 equivalent to Pall Code 3.

Liquid Retention Ratings (μm) (by ASTM F-795 Test)

Single Pass	Multi-Pass
0.5	0.2
1	0.5
3	1
10	3
25	10

Typical Flow vs. Differential Pressure for Application Sizing

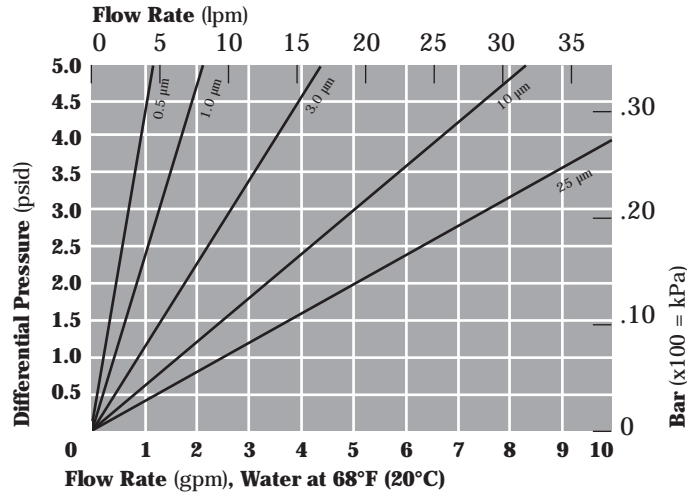

Part Numbers/Ordering Information


T ■ × ● Y - ▼ (e.g., T003BBW20-M3)

Code	Filter Grades
0.5	0.5 μm
001	1 μm
003	3 μm
010	10 μm
025	25 μm

Code	Diameter (nominal)
A	2 1/2" (DOE only)
BB	2 13/16" (M3 only)

Code	Cartridge Lengths (nominal)
10	10"
W20	20"
W30	30"
W40	Consult Factory for 40"

Multi-Pass

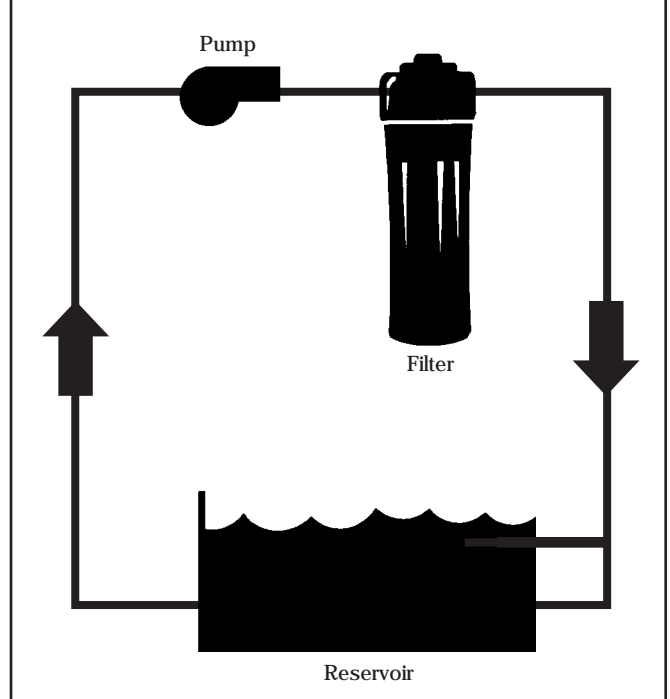

Flow rate is per 10" (25.4 cm) cartridge. For liquids other than water, multiply differential pressure by fluid viscosity (cP).

Code	End Configurations
Blank	DOE industrial ("A" diameter)
M3	SOE flat closed end, external 222 O-ring (retrofits other manufacturers' Code 0) ² ("BB" diameter)

² - For details, contact Pall Corporation.

LENNTECH

info@lenntech.com

www.lenntech.com

Tel. +31-15-261.09.00

Fax. +31-15-261.62.89

Pall Corporation has offices and plants throughout the world. For Pall representatives in your area, please go to www.pall.com/corporate_contact.asp.

Please contact Pall Corporation for product applicability to specific National legislation and/or Regional Regulatory requirements for water and food contact use.

Because of technological developments related to the products, systems, and/or services described herein, the data and procedures are subject to change without notice. Please consult your Pall representative or visit www.pall.com to verify that this information remains valid.

© Copyright 2008, Pall Corporation. Pall, FT Classic, and Fluorite are trademarks of Pall Corporation. * Indicates a trademark registered in the USA. Filtration. Separation. Solution.sm is a service mark of Pall Corporation.