



DUO-FINE® E Series Filter Cartridges

High Capacity Pleated Filter Cartridges With Microfiberglass Media

- Unique Microfiberglass Media Provides Exceptional Dirt Holding Capacity For Longer Service Life
- 304 Stainless Steel Center Core and End Caps Available for High Temperature Applications
- Small Diameter Fibers Ensure High Flow Rates at Low Pressure Drops
- Economical Alternative to Stringwound Cartridges
- Available in Retention Ratings of 0.2 to 50 microns (µm)
- Protective Netting is Color-Coded for Easy Identification of Micron Ratings
- End Configurations to Fit Most Housings
- Core Material Options for Different Temperature Compatibility

Performance Specifications

Filter Grade (90% Retention Rating by ASTM

F-795 Test):

0.2, 0.45, 1, 3, 10, 30, 50 µm (nominally rated)

Recommended Change Out Differential Pressure¹:

35 psid (2.4 bard)

Maximum Differential Pressure:

Polypropylene Hardware:

75 psid (5.2 bard) @ 68°F (20°C)

40 psid (2.8 bard) @ 150°F (65°C)

304 Stainless Steel Hardware:

75 psid (5.1 bard) @ 250°F (121°C)

Sterilization:

All Duo-Fine E Series cartridges may be autoclaved for 30 minutes at 250°F (121°C) under no end load conditions. Cartridges with 304 stainless steel core and end caps may be steamed in-line at 250°F (121°C) for up to one hour. Do not reverse flow under steam conditions, damage to the filter may occur.

Product Specifications

Materials of Construction:

Filter Media:

50 µm: Spunbonded Polyester
All Other Grades: Borosilicate Microfiberglass with Acrylic Binder

Support Material: Spunbonded Polyester

Netting: Polypropylene

Hardware: Polypropylene or 304 Stainless Steel²

Sealing: Thermal Bond

Gaskets/O-rings: Silicone Elastomer, Buna N, Viton³ A, Nordel, FEP Encapsulated Silicone, Expanded PTFE, White Buna N, White Silicone

Dimensions (nominal):

Outside Diameter: 2 3/8" (6.6 cm)
Lengths: 4" (10.2 cm), 9 3/4" (24.8 cm), 10" (25.4 cm), 19 1/2" (49.5 cm), 20" (50.8 cm), 29 1/4" (74.3 cm), 30" (76.2 cm), 39" (99.1 cm), 40" (102 cm)



Color Code Chart For Duo-Fine E Series

Netting Color	Micron Rating
Green	0.2
Yellow	0.45
White	1
Blue	3
Red	10
Purple	30
Orange	50

Particle Retention (µm)

Cartridge Designation	Liquid Service (by ASTM F-795 Test)		Gas Service
	90% Efficiency	>99.9% Efficiency	Removal Efficiency by DOP Test
DFN 0.2	0.2	1.0	99.999%
DFN 0.45	0.45	2.0	99.998%
DFN 1	1.0	4.0	96%
DFN 3	3.0	10.0	_____
DFN 10	10.0	18.0	_____
DFN 30	30.0	45.0	_____
DFN 50	50.0	75.0	_____

¹ - Provided that the maximum differential pressure is not exceeded based on temperature limits defined above.

² - 304 stainless steel end caps are epoxy bonded.

³ - Registered trademark of DuPont Dow Elastomers.

Duo-Fine E Series filter cartridges have been extensively laboratory and field tested to determine removal efficiencies in the most stringent of operating conditions.

The removal rating of any filtration device will depend, to some extent, on the conditions under which it is used or tested. The test results will be influenced by the nature of the fluid, its viscosity, the flow rate, the type of contaminant and the temperature. The absolute ratings given above represent the diameter of the largest hard spherical particle that will pass through the filter under normal operating conditions. Contact Pall for a complete description of Pall's test procedures.

The DOP test measures the ability of the filter to capture fine droplets in air or gas. The retentions given above represent the removal efficiencies with respect to an aerosol dispersion of 0.3 µm Dioctyl Phthalate (DOP) particles.

Part Numbers/Ordering Information

DFN ■ - ● ◆ - ▼ ▸ - * (e.g., DFN 0.2-10UN-M3B-BLK)

Code ■	Filter Grades
0.2	0.2 µm
0.45	0.45 µm
1	1 µm
3	3 µm
10	10 µm
30	30 µm
50	50 µm


Code ●	Cartridge Lengths (nominal)
4	4"
9.75	9.75"
10	10"
19.5	19.5"
20	20"
29.25	29.25"
30	30"
39	39"
40	40"

Code ■	Core Materials
U	Polypropylene
A	304 Stainless Steel

Code ◆	Gasket/O-ring Materials
S	Silicone
N	Buna N
E	Nordel
V	Viton A
T	FEP Encapsulated Silicone (O-rings)
M	White Silicone
W	White Buna N (gaskets)
X	No O-ring required (M2 style only)
T	Expanded PTFE (gaskets)

⁴ - For details, contact Pall Corporation.

Typical Flow vs. Differential Pressure for Application Sizing

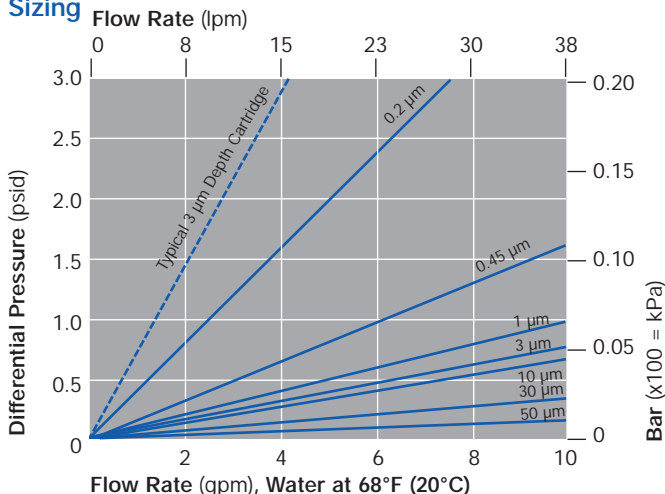

Flow rate is per 10" (25.4 cm) cartridge. For liquids other than water, multiply differential pressure by fluid viscosity (cP).

Code ▼	End Configurations
Blank	DOE with elastomer gasket seals & end caps
1X	DOE, 1" (2.54 cm) extended core
M2	SOE flat closed end, fits housings with 020 O-ring post (polypropylene hardware only)
M3	SOE flat closed end, external 222 O-rings (retrofits other manufacturers' Code 0) ⁴ (polypropylene hardware only)
M5	DOE internal 120 O-rings (retrofits 213 O-ring style) ⁴ (polypropylene hardware only)
M6	SOE flat closed end, external 226 O-rings (retrofits other manufacturers' Code 6) ⁴ (polypropylene hardware only)
M7	SOE fin end, external 226 O-rings (retrofits other manufacturers' Code 7) ⁴ (polypropylene hardware only)
M8	SOE fin end, external 222 O-rings (retrofits other manufacturers' Code 5) ⁴ (polypropylene hardware only)
M10	DOE, internal O-rings (fits other manufacturers' housings) ⁴ (polypropylene hardware only)
M11	SOE flat closed end, internal 120 O-ring (retrofits other manufacturers' X style) ⁴ (polypropylene hardware only)

Code ▽	Bubble Test Option	Code *	Packaging
Blank	Sample Bubble Tested	Blank	Standard Packaging
B	100% Bubble Test	-BLK	Bulk Packaging ⁴

Pall Corporation has offices and plants throughout the world in locations including: Argentina, Australia, Austria, Belgium, Brazil, Canada, China, France, Germany, India, Indonesia, Ireland, Italy, Japan, Korea, Malaysia, Mexico, the Netherlands, New Zealand, Norway, Poland, Puerto Rico, Russia, Singapore, South Africa, Spain, Sweden, Switzerland, Taiwan, Thailand, United Kingdom, United States, and Venezuela. Distributors are located in all major industrial areas of the world.

LENNTECH

info@lenntech.com

www.lenntech.com

Tel. +31-15-261.09.00

Fax. +31-15-261.62.89

© Copyright 2005, Pall Corporation. Pall, and Duo-Fine are trademarks of Pall Corporation. ® Indicates a Pall trademark registered in the USA. Filtration. Separation. Solution.SM is a service mark of Pall Corporation.