

Resinex™ BR-1

Weak base anion exchange resin for boron removal

Resinex™ BR-1 is a macroporous, weak based anion resin, special developed for boron removal. The macroporous matrix of the polystyrene-divinylbenzene-copolymer offers a very high stability against mechanical and chemical degradation. The high selectivity provides an excellent efficiency to economically remove boron from drinking water and various other solutions.

Typical Properties

Type	Crosslinked polystyrene divinylbenzene
Form	Macroporous, lite yellow, spherical beads
Functional group	N-Methyl glucamine functionality
Whole bead count	95% min.
Ionic form, as shipped	Free base
Bead size	0.31 - 1.25 mm
Uniformity coefficient	1.60 max.
Bulk density, as shipped	730 kg/m ³
Real density	1.07 g/cm ³
Water retention	52 - 60%
Total capacity	0.80 eq/l min.
Stability, temperature	80°C max.
Stability, pH	0 - 8

Standard Design Conditions

Bed depth	> 750 mm
Service flow rate	10 - 30 BV/h
Backwash expansion	50 - 75%

Key Features and Benefits

- **Specially Treated For Low Extractables**
Suitable for drinking water applications
- **High Mechanical Stability**
Excellent resistance to mechanical degradation ensures low pressure drop
- **Extremely Selective**
High performance and efficiency

Typical Applications


- Boron removal from drinking water
- Boron removal in ultrapure water treatment
- Various industrial applications

Standard Packaging


- 25 lit. PE valve bag
- 1000 litre big bag

Weak base anion exchange resin for boron removal

Pressure Drop

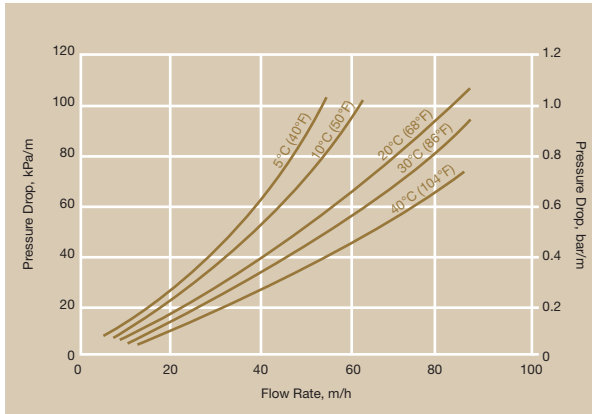

Backwash Expansion

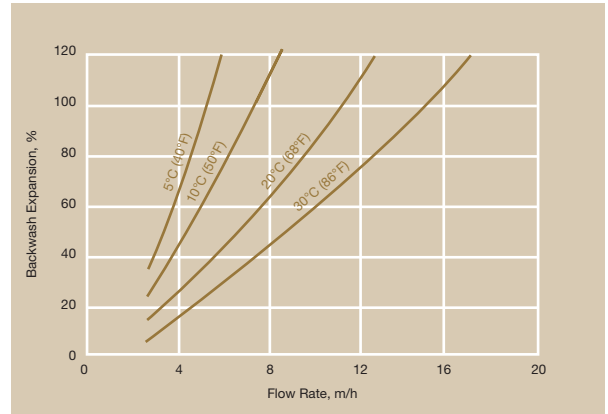

Standard Regeneration Parameters

Co-Flow

Concentration	8-10% H ₂ SO ₄
Level	100-120 g/l
Flow rate regenerant	5-7 BV/h
Flow rate rinse	5-7 BV/h
Conditioning	3-5% NaOH
Level	120-150 g/l
Flow rate	5-7 BV/h
Flow rate rinse	5-7 BV

Product Packing



25 lit. polyethylene valve bag
48 bags per pallet



Polypropylene FIBCs
(big bag), 1.000 lit.



CAUTION Strong oxidizing agents such as nitric acid can react violently with ion exchange resins and cause explosive type reactions. Before using strong oxidants, consult sources knowledgeable in the handling of these materials.



NOTICE Due to the progressive nature of the Jacobi Carbons Group and the continually improving design and performance of our products, we reserve the right to change product specifications without prior notification. The information contained in this datasheet is intended to assist a customer in the evaluation and selection of products supplied by Jacobi Carbons. The customer is responsible for determining whether products and the information contained in this document are appropriate for customer's use. Jacobi Carbons assumes no obligation or liability for the usage of the information in this datasheet, no guarantees or warranties, expressed or implied, are provided. Jacobi Carbons disclaims responsibility and the user must accept full responsibility for performance of systems based on this data.

© Copyright 2013 Jacobi Carbons, Resinex, the Resinex and the Jacobi logos are trademarks of Jacobi Carbons, all of which may or may not be used in certain jurisdictions.

RX-BR-1_e_Rev14_20131#117

LENNTECH
 info@lennotech.com Tel. +31-152-610-900
 www.lennotech.com Fax. +31-152-616-289

