



Pall Corporation

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

MEMBRALOX® SD Sanitary Module


A unique design complying
with the most stringent standards

Description

The **Membralox** SD module range offers a specific sanitary design, unique in the market. All material of construction meet FDA requirements.

The sanitary design ensures that all wetted components are fully accessible to cleaning chemicals. The **Membralox** ceramic membranes and the SD gasketing system provide exceptional compatibility to the harsh chemical sanitizing cycles applied in the food and pharmaceutical industries.

The efficiency and reliability of **Membralox** ceramic membranes have been proven in numerous industrial plants. Some of them are still being in operation for more than 10 years with the original membranes.

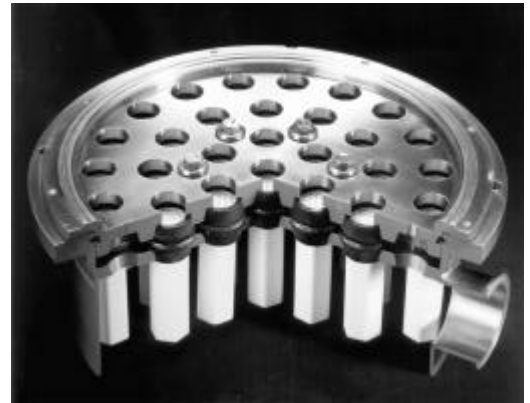

Cost Effective Separations

Combination of the SD design with the excellent characteristics of the **Membralox** ceramic membranes provides economical solutions in the processing of beverages, various food liquids, ingredients and additives, as well as pharmaceutical streams.

Membralox membrane modules can be backflushed, have rugged CIP and steam sterilization capabilities, feature ease of automation - all of which make them a simple but crucial element in process reliability.

Applications

- Bacteria removal from milk, milk protein concentration and/or fractionation
- Sugar and sweeteners clarification
- Food ingredients processing
- Cell harvesting
- Spirits, fruit juices clarification
- Pharmaceutical grade water production
- High value macromolecule processing

Membralox ceramic membranes

| Membrane type | EP3730* | EP3740 | EP1940* | EP1960 |
|---|---------|--------|---------|--------|
| Channel diameter (mm) | 3 | 4 | 4 | 6 |
| Number of channels | 37 | 37 | 19 | 19 |
| Filtration surface area (m ²) | 0.35 | 0.47 | 0.24 | 0.36 |
| Length (mm) | 1020 | 1020 | 1020 | 1020 |

The **Membralox** standard membranes support is made of ultrapure α -alumina with pore size of 12 μ m.

Membralox membrane pore sizes ¹

| | | |
|-----------------|--------------------------------------|-------------------|
| Microfiltration | 1.4*, 0.8*, 0.5, 0.2, 0.1* μ m A | α -alumina |
| Ultrafiltration | 100*, 50, 20 nm Z | zirconia |

¹ Other pore sizes and surface modifications on request. Some pore sizes are not available on all support geometries, please check with Pall Exekia.

Membralox Ceramic Membranes

- High flux
- Proven long operational life
- Excellent resistance to corrosion
- Wide chemical and pH (0-14) compatibility
- Excellent thermal stability
- Sanitizable and sterilizable
- Element burst pressure > 50 bar**
- Ability to withstand high frequency backpulsing cycles
- Meet FDA requirements detailed in 21 CFR
- 100% bubble point integrity tested
- Customized membrane configurations can also be proposed for the most demanding applications

The limits of use of **Membralox** modules are determined mainly by the type of housing or gasket materials. Based on valuable pilot test data, our Scientific and Laboratory Services can provide advice in selecting the best membrane and module configuration to match your process requirements.

Membralox SD 3-A sanitary modules

| SD Modules type | M-1P / M-3P M-12P / M-22 P | M-1P / M-3P / M-7P M-19P / M-37 P |
|---|--|--------------------------------------|
| Membrane type | EP1960 / EP3740 | EP1940 / EP3730 |
| Number of membranes | 1 - 3 - 12 - 22 | 1 - 3 - 7 - 19 - 37 |
| Filtration surface area (m ²) | up to 10.2 | up to 13 |
| Retentate connections | j-clamps (bolt flanges with 22P/37P) / 3-A gaskets | |
| Permeate connections | tri-clamps/ 3-A gaskets | |
| Construction of wetted materials | 316L SS, ceramic, EPDM or FPM | |

Operating limits in aqueous liquids ²

| | |
|-------------|-----------|
| Temperature | 95°C |
| Pressure | 10 bar ** |

² Any liquids belonging to group II from PED 97/23/EC art 9 - § 2.2

Membralox SD Modules

- Conform to 3-A sanitary standard, certificate No 1187
- All wetted parts fully accessible to cleaning chemicals
- All materials of construction meet FDA requirements
- Vertical operating position enables total drainage
- High performance sealing assembly with gasket leak detection, eliminates by-pass possibility between retentate and permeate side
- Modules and membrane components fully traceable, materials certificate available upon

Accessories and Complementary Services

- Backpulse devices
- Permeate flow regulators
- Laboratory scale and benchtop pilot units
- In-house feasibility studies, on-site plant design, commissioning, tests, training courses

* Available in **Membralox GP** membrane version .
0.8 and 1.4 μ m are available in double layer version.

** 1 bar = 100 kPa



LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

© Pall Corporation 2006. P, Pall, Membralox and Exekia are Pall Corporation trademarks. Filtration. Separation. Solution is a service mark of Pall Corporation. ® Indicates a Pall trademark registered in the USA. Features and characteristics of the products described in the present technical sheet are based upon test performed by Pall Exekia in laboratories following precise procedures and upon its experience. These are given for guidance only and are not binding on Pall Exekia for product line. Pall Exekia reserves the right, at any time, to modify the characteristics of the products described herein. DM/DC/011D 03/10/06