



Profile® Star Filter Cartridges for gel and particle removal

Profile Star filter cartridges are pleated depth filters designed for high particle removal efficiency in food and beverage applications.

Description

The Profile Star filter cartridge combines the advantages of a continuously graded pore structure and a unique pleated geometry to provide an increase in effective filtration area and service life.

The pressure drop and flow capability is comparable to competitive pleated polypropylene filters whilst also providing excellent removal of soft contaminants (e.g. gels) because of the depth of the medium.

Features and Benefits

Features	Benefits
Fixed fiber matrix	<ul style="list-style-type: none"> • Consistent filtrate quality • Highly stable structure • Process reliability
Unique pleated medium with no sideseal	<ul style="list-style-type: none"> • Lower capital and installation costs • Smaller assemblies • Lower operating costs • Longer service life • Regenerable
Polypropylene filter construction with no adhesives or surfactants	<ul style="list-style-type: none"> • Increased surface area and mechanical strength

Quality


- Cartridges produced in a controlled environment
- Manufactured according to ISO 9001:2008 certified Quality Management System

Food Contact Compliance

Please refer to the Pall website www.pall.com/foodandbev for a Declaration of Compliance to specific National Legislation and/or Regional Regulatory requirements for food contact use.



Profile Star Filter Cartridges

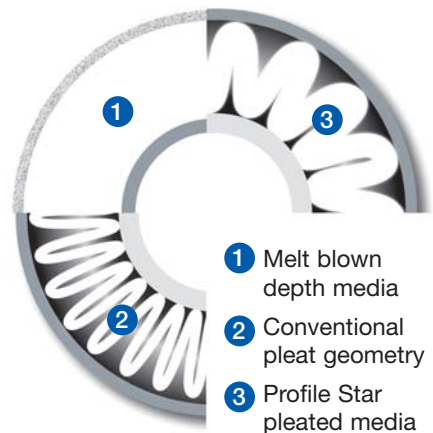

Materials of Construction

Filter Medium	Pleated Polypropylene
Cage, Core, Fin End and End Cap	Polypropylene
Adaptor	Polypropylene with a stainless steel reinforcing ring
O-Ring Seal	Ethylene Propylene Rubber or Silicone Elastomer


Technical Information

Operating Characteristics in Compatible Fluids¹

Maximum Differential Pressure	Operating Temperature
5.0 bard (72 psid) (forward)	<50 °C (122 °F)
3.4 bard (50 psid) (forward)	<80 °C (176 °F)
0.3 bard (5 psid) (forward)	<125 °C (257 °F)

¹Compatible fluids are defined as those which do not swell, soften or attack any of the filter components.

Typical Flow Rates²

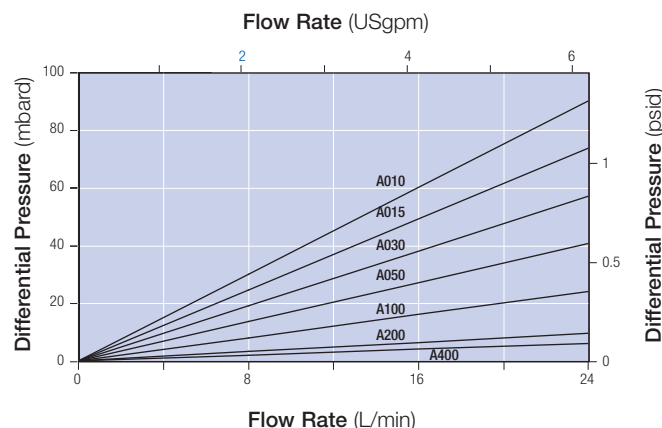

²Typical initial clean media ΔP 254 mm (10") element, water at 20 °C, viscosity 1 cP. For assistance with filter assembly, sizing and housing selection, contact your local Pall representative.

Liquid Removal Rating

Grade	Rating (μm) at 99.98% Efficiency (β -5000) ³	Rating (μm) at 99% Efficiency (β -100)
A010	*1	–
A015	*1.5	–
A030	3	*1.6
A050	5	3
A100	10	7.5
A200	20	16
A400	*40	–

Profile Star filter cartridge liquid retention ratings are based on modified OSU-F2 test.

³The A010 grade has a 99.8% removal efficiency.

*extrapolated value.

Sterilization and Sanitization

Method	Temperature	Cumulative Time
<i>in situ</i> Steam Sterilization	125 °C (257 °F)	10 hours
<i>in situ</i> Hot Water Sanitization	80 °C (176 °F)	

For applications requiring sterilization or sanitization, Pall recommends the use of Code 7 adaptors to ensure filter sealing after cooling.

Ordering Information

This information is a guide to the part number structure and possible options. For availability of specific options and housing details, please contact Pall.

Element Part Number: AB Table 1 Table 2 Table 3 W Table 4

Table 1: Nominal Length

Code	Length
1	254 mm (10")
2	508 mm (20")
3	762 mm (30")
4	1016 mm (40")

Table 2: Removal Rating*

Code
A010
A015
A030
A050
A100
A200
A400

*Liquid removal rating specifics are detailed in the Liquid Removal Rating Table

Table 3: Adaptor

Code	Description
3	SOE - single open end with flat closed end and external 222 O-rings
7	SOE - single open end with fin end, 2 locking tabs and external 226 O-rings
8	SOE - single open end with fin end and external 222 O-rings
28	SOE - single open end with fin end, 3 locking tabs and external 222 O-rings

(Code 3, 7 and 8 may be available in selected grades, confirm code availability with your Pall representative.)

Table 4: O-ring Seal Material

Code	Description
H4	Silicone Elastomer
J	Ethylene Propylene Rubber



LENNTECH

info@lenntech.com

www.lenntech.com

Tel. +31-15-261.09.00

Fax. +31-15-261.62.89

Filtration. Separation. Solution.SM

Visit us on the Web at www.lenntech.com

Pall Corporation has offices and plants throughout the world. For Pall representatives in your area, please go to www.lenntech.com/contact

Please contact Lenntech Corporation to verify that the product conforms to your national legislation and/or regional regulatory requirements for water and food contact use.

Because of technological developments related to the products, systems, and/or services described herein, the data and procedures are subject to change without notice. Please consult your Pall representative or visit www.lenntech.com to verify that this information remains valid.

© Copyright 2010, Pall Corporation. Pall, Profile are trademarks of Pall Corporation.

* Indicates a trademark registered in the USA. Filtration. Separation. Solution. SM is a service mark of Pall Corporation.