

Resinex™ AP-2 UB

Strong base anion exchange resin

Resinex™ AP-2 UB is a high purity, premium grade, strongly basic macroporous anion exchange resin type 2. The macroporous crosslinked matrix offers a very high resistance to physical breakage and organic fouling. Its remarkable physical stability together with the low regenerant consumption makes it highly suitable for industrial applications especially for surface water treatment.

The selected bead distribution of **Resinex™ AP-2 UB** is especially adapted for all modern counter-current systems (i.e. Schwebebett, UPCORE,..).

Typical Properties

Type	Crosslinked polystyrene divinylbenzene
Form	Macroporous, milky white, spherical beads
Functional group	Quaternary amine, Type II
Whole bead count	95% min.
Ionic form, as shipped	Cl ⁻
Bead size	(≥ 90%) 0.50 - 0.71 mm
Uniformity coefficient	1.20 max.
Bulk density, as shipped	700 kg/m ³
Real density	1.10 g/cm ³
Water retention	47 - 57%
Total capacity (Cl ⁻ form)	1.20 eq/l min.
Volume change Cl ⁻ → OH ⁻	15% max.
Stability, temperature	60°C (OH ⁻ form) max.
Stability, pH	0 - 14

Standard Design Conditions

Bed depth	> 700 mm
Service flow rate	8 - 55 BV/h
Backwash expansion	50 - 75%

Key Features and Benefits

- **High Integrity Beads**
Excellent resistance to mechanical degradation ensures low pressure drop
- **Excellent Resistance To Organic Fouling**
Removable organics
- **Resistance To Osmotic Shock**
Extended lifetime and very low number of broken beads
- **Uniform Bead Size**
Lower pressure drop and regenerant consumption

Typical Applications

- Demineralisation in industrial water treatment systems, especially in the presence of high organic loadings
- Demineralisation and polishing when used in combination with **Resinex™ KP UB**


Standard Packaging

- 25 lit. PE valve bag
- 1000 litre big bag


Resinex™ AP-2 UB

Strong base anion exchange resin

Pressure Drop

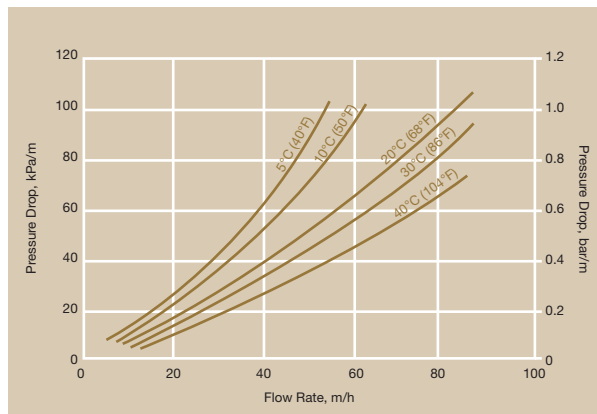

Backwash Expansion

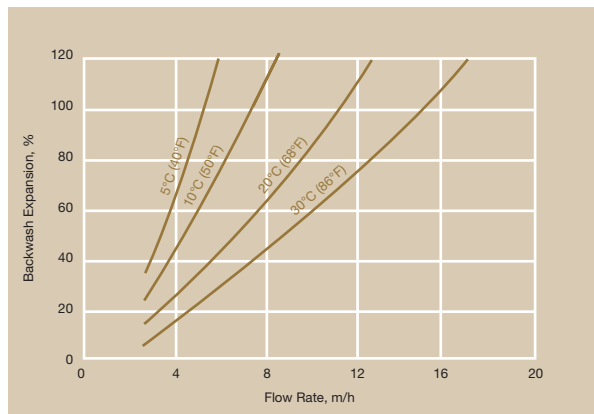

Standard Regeneration Parameters

Co-Flow

Counter-Flow

Concentration	4% NaOH	2% NaOH
Level	80-130 g/l	55-75 g/l
Flow rate regenerant	4-6 BV/h	6-8 BV/h
Contact time regenerant	30-60 min.	20-40 min.
Flow rate slow rinse	4-6 BV/h	6-8 BV/h
Slow rinse water required	2-4 BV	2 BV
Flow rate fast rinse	10-30 BV/h	10-30 BV/h
Fast rinse water required	6-10 BV	6-10 BV

The use of a weak base solution such as ammonia or sodium carbonate as a regenerant is an alternative to caustic soda. Please contact your nearest Jacobi Carbons sales office for further information.

Product Packing



25 lit. polyethylene valve bag
48 bags per pallet



Polypropylene FIBCs
(big bag), 1,000 lit.



CAUTION Strong oxidizing agents such as nitric acid can react violently with ion exchange resins and cause explosive type reactions. Before using strong oxidants, consult sources knowledgeable in the handling of these materials.



NOTICE Due to the progressive nature of the Jacobi Carbons Group and the continually improving design and performance of our products, we reserve the right to change product specifications without prior notification. The information contained in this datasheet is intended to assist a customer in the evaluation and selection of products supplied by Jacobi Carbons. The customer is responsible for determining whether products and the information contained in this document are appropriate for customer's use. Jacobi Carbons assumes no obligation or liability for the usage of the information in this datasheet, no guarantees or warranties, expressed or implied, are provided. Jacobi Carbons disclaims responsibility and the user must accept full responsibility for performance of systems based on this data.

© Copyright 2012 Jacobi Carbons, Resinex, the Resinex and the Jacobi logos are trademarks of Jacobi Carbons, all of which may or may not be used in certain jurisdictions.

RX-AP2UB_e_Rev11_20130125

LENNTECH

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

JACOBI
THE CARBON COMPANY