

Resinex™ CAT-2

Strong acid cation exchange resin for catalysis

Resinex™ CAT-2 is a dried, high purity, premium grade, strongly acidic macroporous-type cation exchange resin in spherical bead form, specially designed as a heterogeneous catalyst for the processing of organic and aqueous liquids and for organic reactions e.g. MTBE, TAME and ETBE.

The macroporous matrix offers a high mechanical stability, the extended capacity and the special pore structure enables **Resinex™ CAT-2** to be used in polar and non-polar media and for base adsorption in aqueous and organic liquids.

Typical Properties

Type	Crosslinked polystyrene divinylbenzene
Form	macroporous, opaque, spherical beads
Functional group	Sulfonic acid
Whole bead count	95% min.
Ionic form, as shipped	H ⁺
Bead size	(≥ 90%) 0.45 - 1.25 mm
Uniformity coefficient	1.60 max.
Bulk density, as shipped	830 kg/m ³
Real density	1.25 g/cm ³
Total capacity	1.75 eq/l min.
Surface area (BET)	40-50 m ² /g
Pore diameter	200-300 Å
Stability, temperature	120°C
Storage, temperature	4-50°C
Stability, pH	1-14
Water content	5% max.
Storability	2 years
Storage condition	under roof, dry

Key Features and Benefits

- **High Integrity Beads**
Excellent resistance to mechanical degradation ensures low pressure drop
- **Extended Operating Capacity**
Economical Advantage
- **Special Pore Structure**
Enables the usage for organic liquids
- **Dried**
Ready-to-use for non-aqueous liquids

Typical Applications

- MTBE, TAME, ETBE
- Esterification, Etherification, condensation and alkylation of polar and non-polar molecules
- Cation removal
- Adsorption from organic and aqueous liquids

Standard Packaging

- 25 lit. PE valve bag
- 1000 litre big bag




A TRADEMARK OF JACOBI CARBONS. WWW.JACOBI.NET

Resinex™
Ion Exchange Resin


Resinex™ CAT-2

Strong acid cation exchange resin for catalysis

Pressure Drop

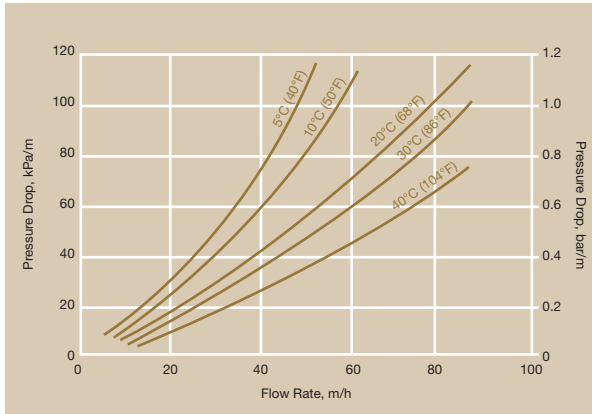

Backwash Expansion

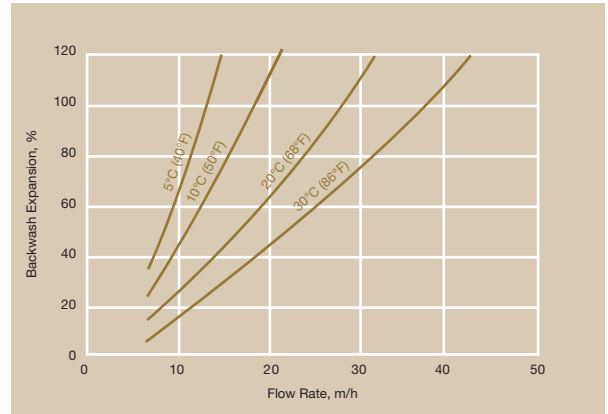

Product Packing



25 lit. polyethylene valve bag
48 bags per pallet



Polypropylene FIBCs
(big bag), 1.000 lit.



CAUTION Strong oxidizing agents such as nitric acid can react violently with ion exchange resins and cause explosive type reactions. Before using strong oxidants, consult sources knowledgeable in the handling of these materials.



NOTICE Due to the progressive nature of the Jacobi Carbons Group and the continually improving design and performance of our products, we reserve the right to change product specifications without prior notification. The information contained in this datasheet is intended to assist a customer in the evaluation and selection of products supplied by Jacobi Carbons. The customer is responsible for determining whether products and the information contained in this document are appropriate for customer's use. Jacobi Carbons assumes no obligation or liability for the usage of the information in this datasheet, no guarantees or warranties, expressed or implied, are provided. Jacobi Carbons disclaims responsibility and the user must accept full responsibility for performance of systems based on this data.

© Copyright 2014 Jacobi Carbons, Resinex, the Resinex and the Jacobi logos are trademarks of Jacobi Carbons, all of which may or may not be used in certain jurisdictions.

RX-CAT2_e_Rev12_20140324

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

