

## Resinex™ K-8 MB H

Strong acidic cation exchange resin



**Resinex™ K-8 MB H** is a high purity, strongly acidic gel-type cation exchange resin. The crosslinked, polystyrene divinylbenzene matrix provides excellent resistance to physical breakdown. The high capacity achieved in demineralisation makes it suitable for most standard industrial water treatment applications. Together with optimisation of regenerant consumption, **Resinex™ K-8 MB H** will allow you to obtain a high quality process water in economical manner. The special particle size offers a low pressure drop and makes it suitable for mixed bed applications.

### Typical Properties

Type	Crosslinked polystyrene divinylbenzene
Form	Gel-type, amber, spherical beads
Functional group	Sulfonic acid
Whole bead count	95% min.
Ionic form, as shipped	H <sup>+</sup>
Bead size	0.70 - 1.25 mm
Uniformity coefficient	1.6 max.
Bulk density, as shipped	815 kg/m <sup>3</sup>
Real density	1.21 g/cm <sup>3</sup>
Water retention	45 - 48%
Total capacity (H <sup>+</sup> form)	1.80 eq/l min.
Volume change Na <sup>+</sup> → H <sup>+</sup>	8% max.
Stability, temperature	120°C max.
Stability, pH	0 - 14

### Standard Design Conditions

Bed depth	> 700 mm
Service flow rate	8 - 45 BV/h
Backwash expansion	50 - 75%

### Key Features and Benefits

- **High Integrity Beads**  
Excellent resistance to mechanical degradation ensures an extended life-time
- **Extended Operating Capacity**
- **High Crosslinked**  
Excellent mechanical and chemical resistance
- **Selected Bead Size**  
Lower pressure drop perfect separation in mixed bed applications

### Typical Applications

- Polishing mixed bed when used in combination with **Resinex™ A-4 MB**


### Standard Packaging

- 25 lit. PE valve bag
- 1000 litre big bag


## Resinex™ K-8 MB H

Strong acidic cation exchange resin

### Pressure Drop

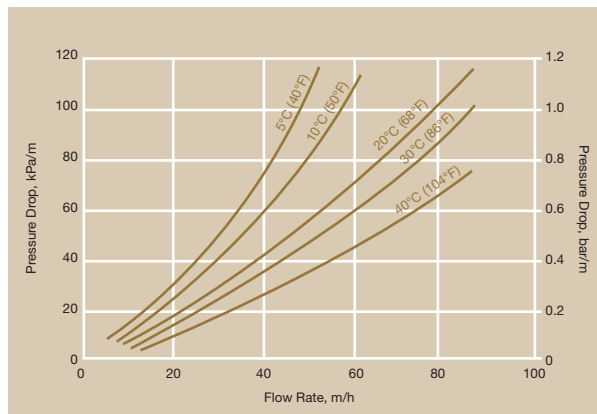

### Backwash Expansion

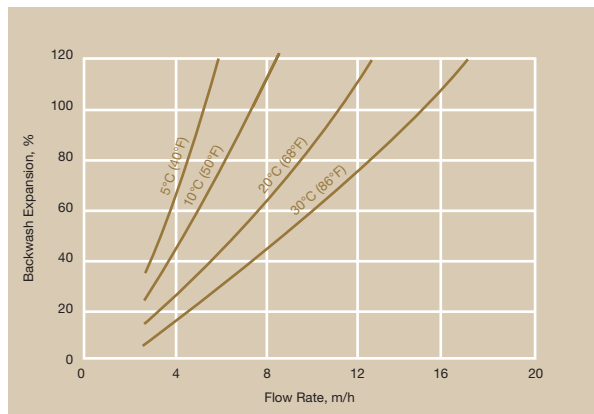

### Standard Regeneration Parameters

### Co-Flow

### Counter-Flow

Concentration	8% HCl	5% HCl
Level	60-150 g/l	45-70 g/l
Flow rate regenerant	4-6 BV/h	5-8 BV/h
Contact time regenerant	30-60 min.	20-40 min.
Flow rate slow rinse	2-20 BV/h	5-20 BV/h
Slow rinse water required	8-15 BV	3-6 BV
Flow rate fast rinse	20-40 BV/h	20-40 BV/h
Fast rinse water required	8-15 BV	3-6 BV

### Product Packing



25 lit. polyethylene valve bag  
48 bags per pallet



Polypropylene FIBCs  
(big bag), 1.000 lit.



**CAUTION** Strong oxidizing agents such as nitric acid can react violently with ion exchange resins and cause explosive type reactions. Before using strong oxidants, consult sources knowledgeable in the handling of these materials.



**NOTICE** Due to the progressive nature of the Jacobi Carbons Group and the continually improving design and performance of our products, we reserve the right to change product specifications without prior notification. The information contained in this datasheet is intended to assist a customer in the evaluation and selection of products supplied by Jacobi Carbons. The customer is responsible for determining whether products and the information contained in this document are appropriate for customer's use. Jacobi Carbons assumes no obligation or liability for the usage of the information in this datasheet, no guarantees or warranties, expressed or implied, are provided. Jacobi Carbons disclaims responsibility and the user must accept full responsibility for performance of systems based on this data.

© Copyright 2012 Jacobi Carbons, Resinex, the Resinex and the Jacobi logos are trademarks of Jacobi Carbons, all of which may or may not be used in certain jurisdictions.

RXK8MBH\_e\_Rev.14\_20131127

## LENNTECH

info@lenntech.com Tel. +31-152-610-900  
www.lenntech.com Fax. +31-152-616-289



**JACOBI**  
THE CARBON COMPANY