

# Resinex™ KW-8 UB

## Strong acid cation softening resin

**Resinex™ KW-8 UB** is a high purity, premium grade, pretreated, monospheric, strongly acidic gel-type cation exchange resin specially designed for residential drinking water treatment. The KW-8 is a bead type, crosslinked, polystyrene divinylbenzene resin that offers excellent bead integrity and very low extractables. The product is highly suitable for a wide variety of drinking water treatment applications. **Resinex™ KW-8 UB** has a light amber color and is specially pretreated to remove taste, odor and color throw. **Resinex™ KW-8 UB** meets the requirements of the European ResAP (2004) 3 and WRAS BS 6920.

### Typical Properties

Type	Crosslinked polystyrene divinylbenzene
Form	Gel-type, amber, spherical beads
Functional group	Sulfonic acid
Whole bead count	95% min.
Ionic form, as shipped	Na <sup>+</sup>
Bead size (95% min.)	0.50 - 0.71 mm
Bulk density, as shipped	820 kg/m <sup>3</sup>
Real density	1.28 g/cm <sup>3</sup>
Water retention	45 - 50%
Total capacity (Na <sup>+</sup> form)	1.90 eq/l min.
Volume change Ca <sup>2+</sup> → Na <sup>+</sup>	2% max.
Stability, temperature	120°C max.
Stability, pH	0 - 14
Color throw	25 APHA max.

### Standard Design Conditions

Bed depth	> 700 mm
Service flow rate	8 - 40 BV/h
Backwash expansion	50 - 75%
NaCl concentration for regeneration	8-15%
Regeneration level	8 - 300 g/l
NaCl flow rate for regeneration	5-8 l/h/l
Rinse rate (slow)	1-3 bed volumes at regeneration flow rate
Rinse rate (fast)	3-6 bed volumes at service flow rate
Turbidity	<5.0 NTU
Free chlorine	<1.0 ppm

### Key Features and Benefits

- **Pretreated and Rinsed**  
Guarantees minimal color throw and eliminates taste and odor
- **High Integrity Beads**  
Excellent resistance to mechanical degradation ensures low pressure drop
- **Low Extractables**  
Specially treated to eliminate leaching of organic matter
- **European ResAP (2004) 3 Approved**  
Meets European Council Resolution AP (2004) 3 for use in the processing of foodstuffs
- **WRAS BS 6920 Approved**  
BS 6920 for cold water and hot water up to 85°C

### Typical Applications

- Residential Softening
- Industrial Softening
- Municipal Softening

### Standard Packaging

- 25 lit. PE valve bag
- 1000 litre big bag



This product has been tested and certified to NSF/ANSI Standard 44 for materials safety only.


A minimum flow of 0.39 gpm per cubic foot of media is required.




# Resinex™ KW-8 UB

Strong acid cation softening resin


## Pressure Drop

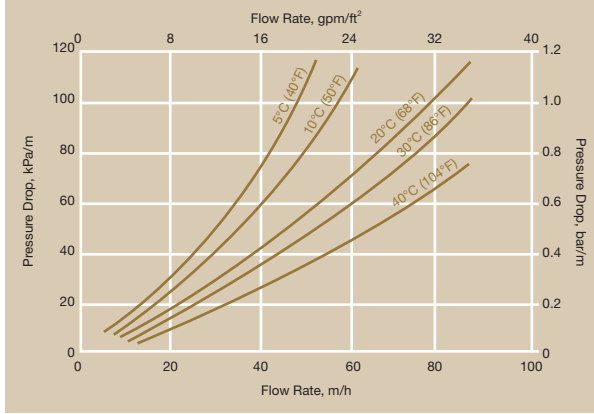


## Backwash Expansion

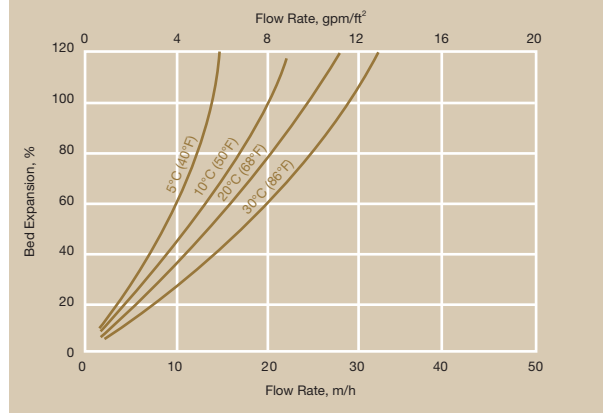

## Capacity Information

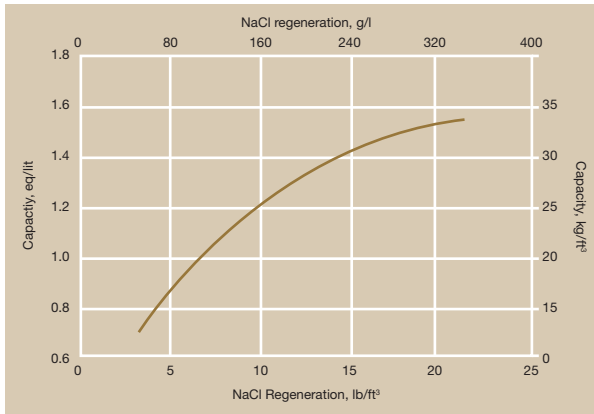

## Hardness Leakage Information

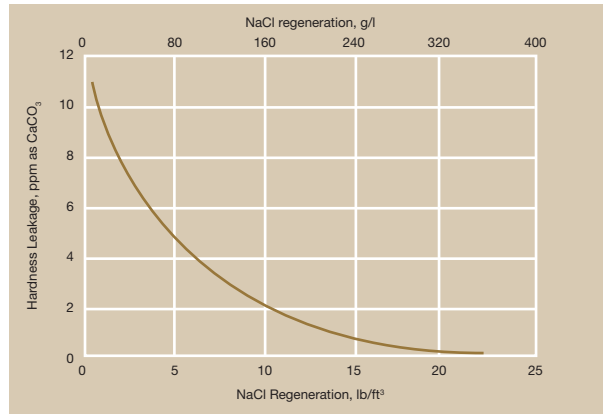

Capacity and Hardness Leakage graphs are shown assuming a service flow of 4 gpm/ft<sup>2</sup> (32 l/h/l) and total dissolved solids of 400 ppm and 20 grains of total hardness. The hardness leakage will increase and the capacity will decrease while increasing total dissolved solids and total hardness.

**NOTICE** If this product is to be used for potable water treatment, or any food grade application, a special procedure must be applied for the initial run. Please ask your nearest Jacobi office for this technical bulletin.

## Product Packing



25 lit. polyethylene valve bag  
48 bags per pallet



Polypropylene FIBCs  
(big bag), 1,000 lit.



**CAUTION** Strong oxidizing agents such as nitric acid can react violently with ion exchange resins and cause explosive type reactions. Before using strong oxidants, consult sources knowledgeable in the handling of these materials.



**NOTICE** Due to the progressive nature of the Jacobi Carbons Group and the continually improving design and performance of our products, we reserve the right to change product specifications without prior notification. The information contained in this datasheet is intended to assist a customer in the evaluation and selection of products supplied by Jacobi Carbons. The customer is responsible for determining whether products and the information contained in this document are appropriate for customer's use. Jacobi Carbons assumes no obligation or liability for the usage of the information in this datasheet, no guarantees or warranties, expressed or implied, are provided. Jacobi Carbons disclaims responsibility and the user must accept full responsibility for performance of systems based on this data.

© Copyright 2015 Jacobi Carbons, Resinex, the Resinex and the Jacobi logos are trademarks of Jacobi Carbons, all of which may or may not be used in certain jurisdiction.

RXKW8UB\_e\_Rev11\_20150602

**LENNTECH**  
[info@lenntech.com](mailto:info@lenntech.com) Tel. +31-152-610-900  
[www.lenntech.com](http://www.lenntech.com) Fax. +31-152-616-289

**JACOBI**  
THE CARBON COMPANY